

KEY

Hatched area 'A' is building footprint and excavation area. Excavations approx $2m \times 2.5m \times 850mm$ deep. DO NOT PREPARE IN ADVANCE.


'B' is level area in front of door about 120mm \underline{above} surrounding ground level and a minimum 1200mm width.


'C' is clear space of approximately 1m wide all round for erection and maintenance.

NOTES

- 1. Door opens out.
- 2. Ramp from any direction at maximum slope of 1:12


Natsol Ltd Tel: 01686 412653 www.natsol.co.uk	Dm. B.Wade	
	Drg. No.	
	Date 8.8.08	Scale 1:50
Natou	Site Dimensions	
NotCol	Full Access (Compus Twin

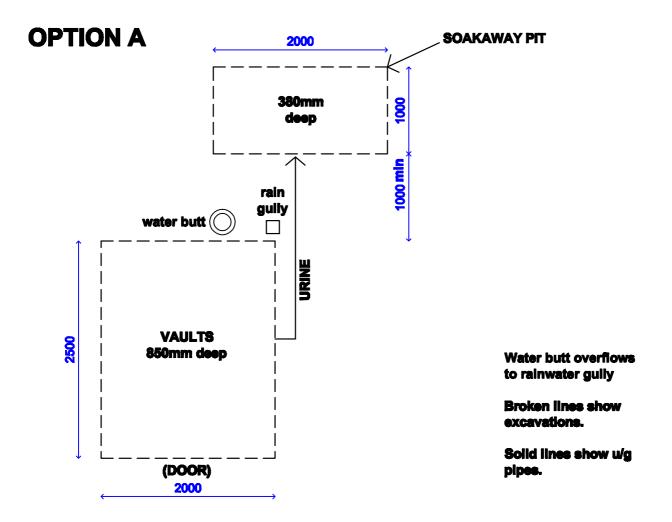

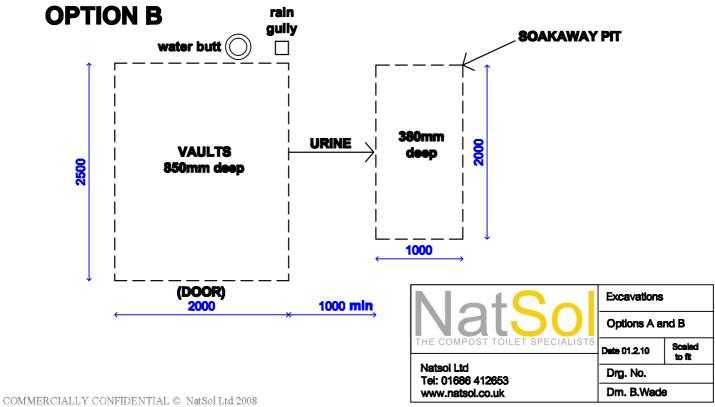




SOAKAWAYS AND FLOODING RISK – SLOPING SITES

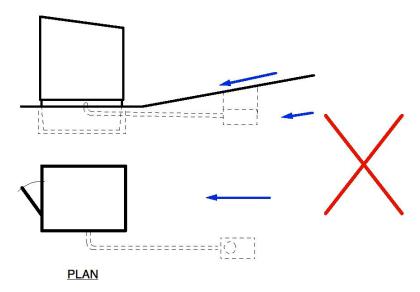

Ground water around the soakaway could cause vaults to flood!!

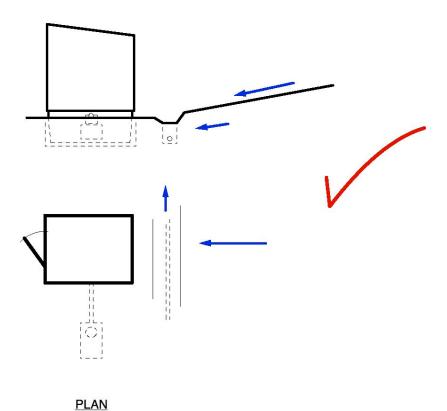

Install a land-drain to prevent flooding of soakaway area.